




LME系列 LME Series (KB Series)

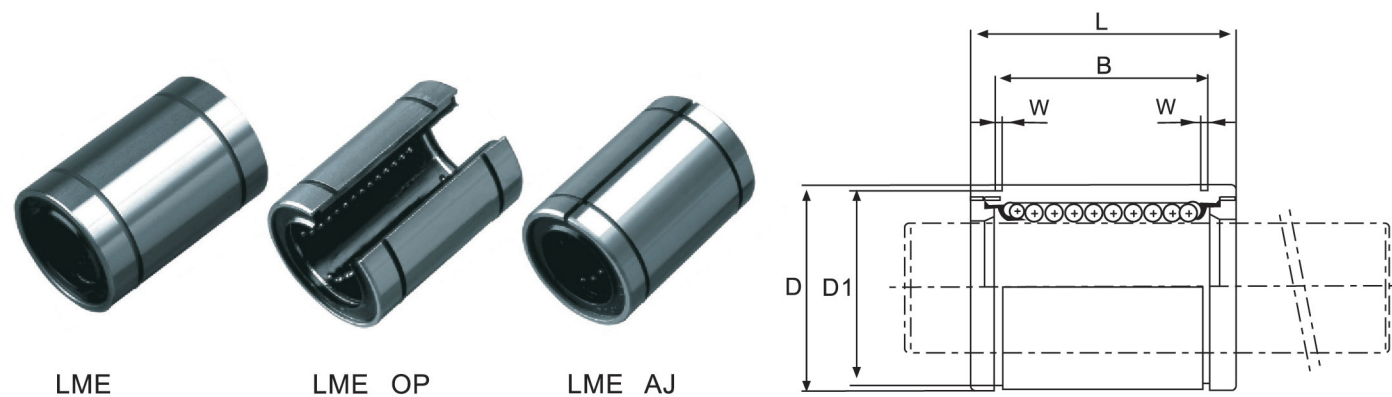

型号 Part No.						主要尺寸和公差		
密封型 Seal Type	钢球列数 Ball Circuit	开口型 Open Type	钢球列数 Ball Circuit	间隙调整型 Adjustable Type	钢球列数 Ball Circuit	dr (mm)	公差 Tolerance (μ m)	D (mm)
LME5UU	4	—	—	LME5UUAJ	4	5	+8 0	12
LME8UU	4	—	—	LME8UUAJ	4	8		16
*LME12UU	4	LME12UU-OP	3	*LME12UUAJ	4	12		22
*LME16UU	5	LME16UU-OP	4	*LME16UUAJ	5	16	+9 -1	26
*LME20UU	5	LME20UU-OP	4	*LME20UUAJ	5	20		32
*LME25UU	6	LME25UU-OP	5	*LME25UUAJ	6	25		40
*LME30UU	6	LME30UU-OP	5	*LME30UUAJ	6	30	+11 -1	47
*LME40UU	6	LME40UU-OP	5	*LME40UUAJ	6	40		62
LME50UU	6	LME50UU-OP	5	LME50UUAJ	6	50		75
LME60UU	6	LME60UU-OP	5	LME60UUAJ	6	60	+13 -2	90

注：*为可配置钢保持架。

Note: *The ball retainer is made from steel or resin.

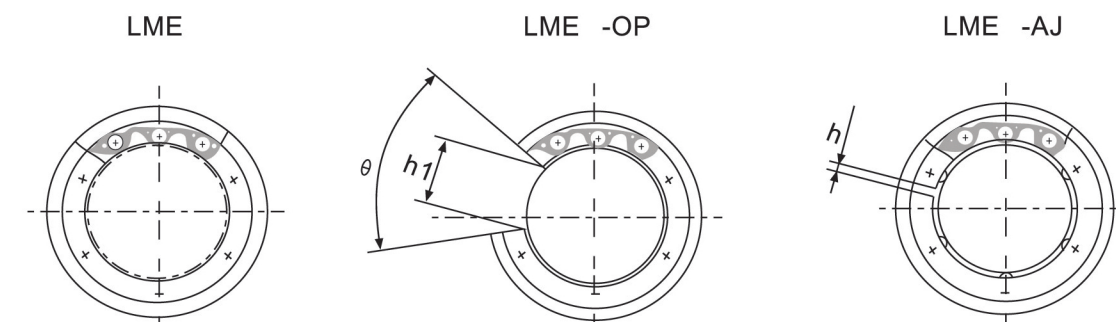

Main Dimensions and Tolerance										偏心率 Eccentricity (max) μm	最大径向 间隙 Radial Clearance (max) μm	额定负荷 Basic Load Rating C Co N N		重量 Weight (g)
公差 Tolerance (μm)	L (mm)	公差 Tolerance (μm)	B (mm)	公差 Tolerance (μm)	W (mm)	D1 (mm)	h (mm)	h1 (mm)	θ					
0 -8	22	0 -200	14.5	0 -300	1.1	11.5	-	-	-	12	-3	206	265	11
	25		16.5		1.1	15.2	-	-	-			265	402	22
0 -9	32		22.9		1.3	21	1.5	7.5	78°		-4	510	784	45
	36		24.9		1.3	24.9	1.5	10	78°			775	1180	60
0 -11	45	0 -300	31.5	0 -400	1.6	30.3	2	10	60°	15	-6	862	1370	102
	58		44.1		1.85	37.5	2	12.5	60°			980	1570	235
	68		52.1		1.85	44.5	2	12.5	50°		-8	1570	2740	360
0 -13	80		60.6		2.15	59	3	16.8	50°	17		2160	4020	770
	100		77.6		2.65	72	3	21	50°		-13	3820	7940	1250
0/-15	125	(0/-400)	101.7		3.15	86.5	3	27.2	54°	20			4700	9800