


SF 軸心 Shaft

材 質：軸承鋼(SUJ2)
處理方式：高週波熱處理及研磨
硬 度：HRC 62±2

Material : SUJ2(high carbon chromium steel)
Treatment : Heat treatment ground and polished
Hardness : HRC 62±2

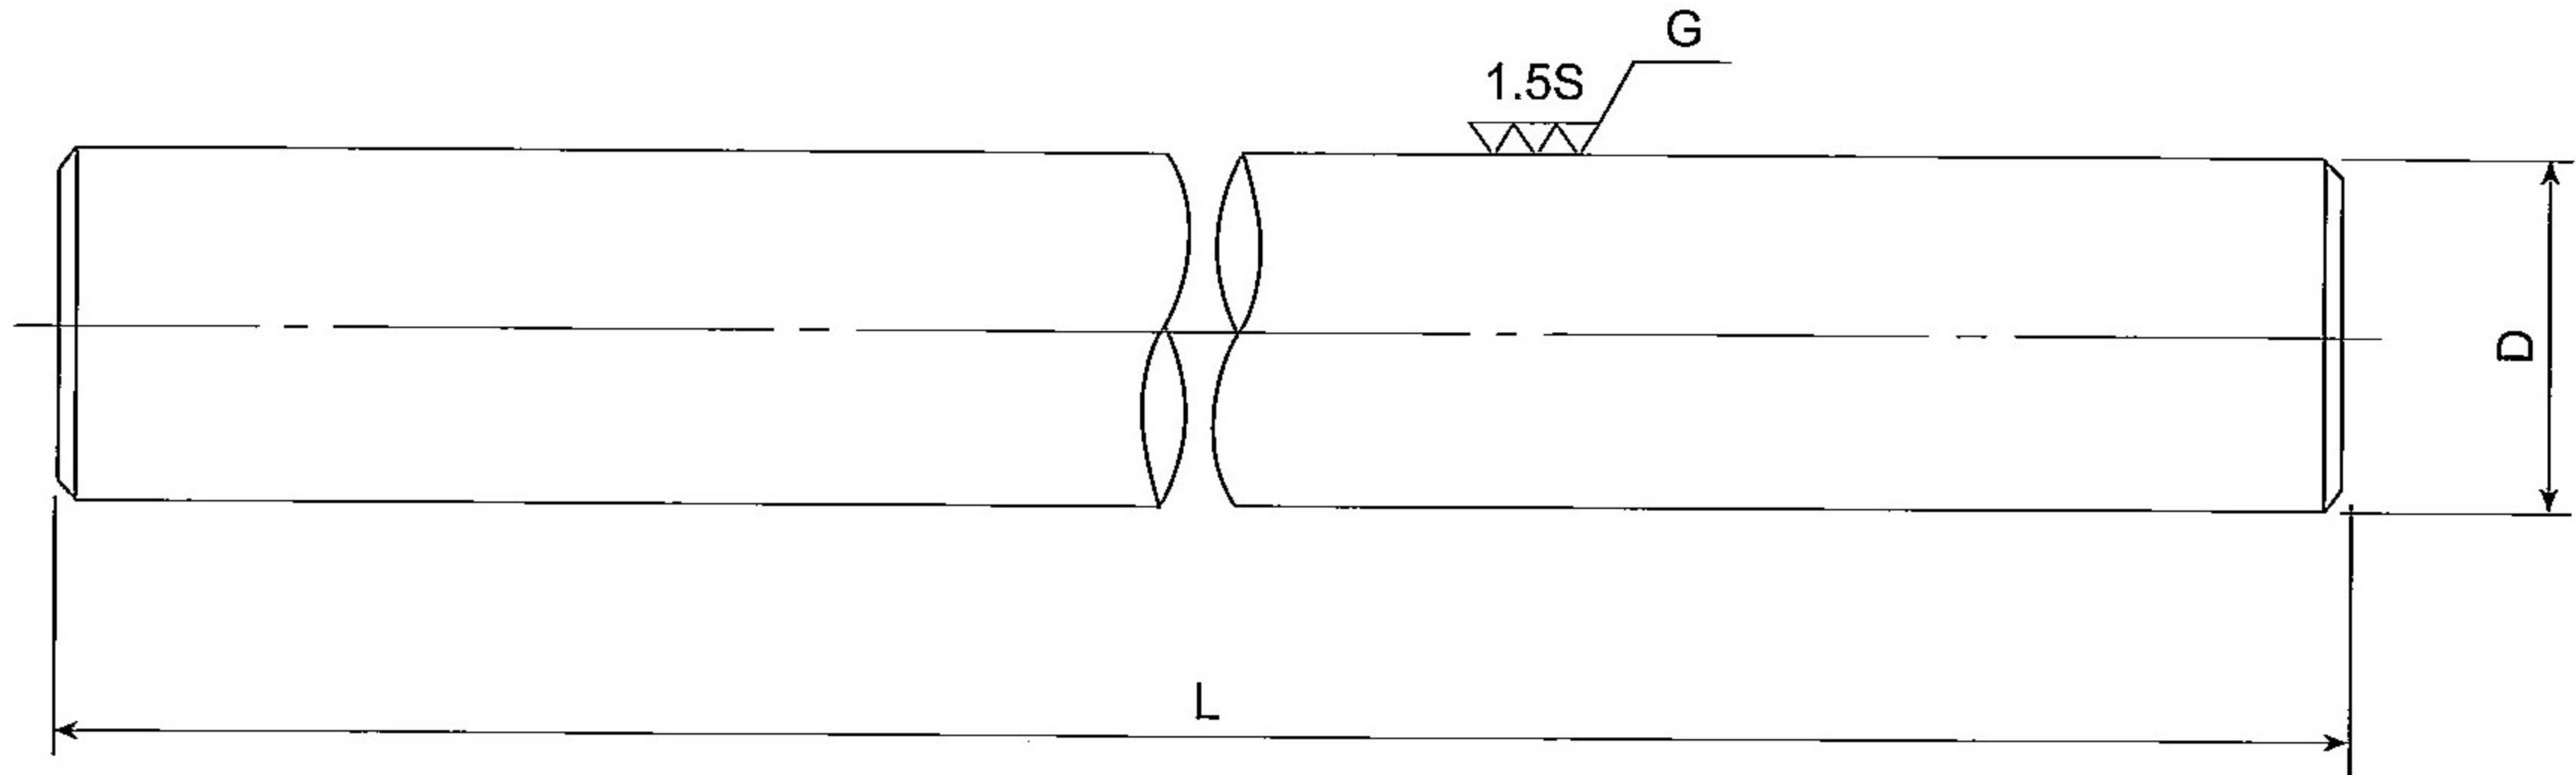

外徑 Diameter	型號 Model No.	外徑公差 Diameter tolerance μm	最大製作長度 Max Length	有效硬化層深度 Depth of effective hardened layer	重量 Weight	外徑 Diameter
mm	SF	g6	L mm	mm	kg/m	mm
3	SF 3		400	1.5以上 1.5 and above	0.06	3
4	SF 4	-4	400		0.10	4
5	SF 5	-12	2000		0.16	5
6	SF 6		3000		0.23	6
8	SF 8	-5	3000		0.40	8
10	SF 10	-14	4000		0.62	10
12	SF 12	-6	6000	2.0以上 2.0 and above	0.89	12
13	SF 13	-17	6000		1.05	13
16	SF 16		6000		1.58	16
20	SF 20	-7	6000	2.5以上 2.5 and above	2.47	20
25	SF 25	-20	6000		3.85	25
30	SF 30		6000	3.0以上 3.0 and above	5.55	30
35	SF 35	-9	6000		7.55	35
40	SF 40	-25	6000		9.87	40
50	SF 50		6000		15.41	50
60	SF 60	-10	6000		22.20	60
80	SF 80	-29	6000	39.46	80	
100	SF 100	-12 -34	6000	61.66	100	